

## ERRATA

### PTI DC10.2-06: Construction and Maintenance Manual for Post-Tensioned Slab-on-Ground Foundations Third Edition 2006

#### DC-10 Slab-on-Ground Committee

The following errata items were added on **10/4/2010**:

#### Page 13, Section 5.2.3:

##### “5.2 General Installation Procedures”


“3. All individuals involved in the installation and stressing operation should be certified as having successfully completed....”

#### Page 17, Section 5.2.16:

“16. ...The supports are placed at each tendon intersection and half way between intersections in cases where the tendon spacing exceeds 4 ft-6 in., as shown in Fig. 5.12”.

#### Page 18, Fig. 5.12:

Replacement Fig. 5.12:

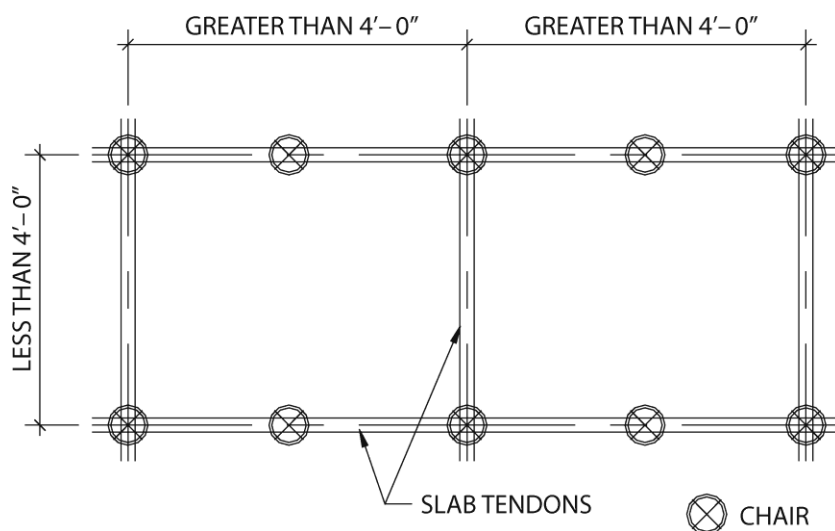

**Page 39, Section 11.4.4:**

**“11.4 Honeycomb in Concrete”**

~~“4. DO NOT use prepackaged concrete repair mixes or additives that contain calcium chloride or other material deleterious to prestressing steel”.~~

Replace to read:

“4. DO NOT use additives that contain calcium chloride or other material deleterious to prestressing steel. Instead, USE prepackaged concrete repair mixes”.

**Page 48, Section 14.1.III.2:**

“2. Cover Requirements:  
.....Slabs: Top 1-1/2 2 in....”

**Page 50, 14.3 Example Typical “Uniform Thickness” Foundation Plan:**

Replacement Fig. B:

ⓑ

